



SHIFTING THE LIMITS

MAGICCLEANER

/ Cleaning CrNi



/ MagicCleaner is the quick and easy electrochemical way to clean CrNi sheets and pipes. Small, compactly built and weighing only 5 kg, the device is ideal for use in the field and in any workshop. It cleans TIG weld-seams quickly and thoroughly using microprocessor-controlled current waveforms. The integral burnishing function lets you polish the surfaces to a lustrous finish after they have been cleaned.

FACTS

- / Electrolyte-feed integrated in the cleaning stylus
- / Automatic and manual liquid-feed modes
- / Special cleaning cloth for extra-long service life
- / Optimised cleaning process for 28 % faster cleaning speed
- / Automatic short-circuit detection
- / Processor-controlled safety cut-out prevents damage to workpiece and triangle


TECHNICAL DATA	
Mains voltage	230V 50/60Hz
Nominal power	300 W
Cleaning-current range	5 - 20 A
Open-circuit voltage	15 V
Working voltage	5 - 15 V
Electrolyte delivery rate	0.55 - 2.2 l/h
Cleaning time	2.2 l/h / 40 min 0.55 l/h / 160 min
Cleaning-fluid reservoir	1.5 l
IEC 'degree of protection' code	IP 23
Dimensions LxWxH	430x180x280 mm (16.9x7.1x11.0 in)
Weight	5 kg (11.0 lbs)



/ CrNi before cleaning

/ after cleaning

/ after burnishing

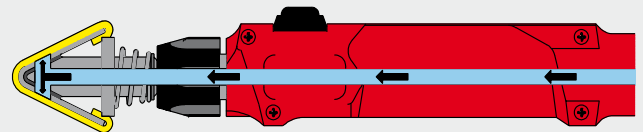

/ Electrolyte-feed integrated in cleaning stylus; flow-rate is precisely dosed in either manual or automatic feed mode.

Fronius Canada Ltd.
 2875 Argentia Road, Units 4,5 & 6
 Mississauga, ON L5N 8G6
 Canada
 Telephone +1 905 288-2100
 Fax +1 905 288-2101
 sales.canada@fronius.com
 www.fronius.ca

Fronius USA LLC
 6796 Fronius Drive
 Portage, IN 46368
 USA
 Telephone +1 877 FRONIUS
 sales.usa@fronius.com
 www.fronius-usa.com

Fronius International GmbH
 Froniusplatz 1
 4600 Wels
 Austria
 Telephone +43 7242 241-0
 Fax +43 7242 241-3940
 sales@fronius.com
 www.fronius.com